

DLPlus mini-trunking: profiles and accessories


BODIES	SECTION	FINISHING ACCESSORIES						
Size and shape	Length 2.10 m	End cap	Internal angle	External angle	Flat angle	Cover joint	Flat T junction	Junction box
20 x 12.5 	0 300 07 0 300 08 6 489 05	0 312 02	0 302 21	0 302 21	0 302 23	0 336 02	0 302 24	0 303 16 ⁽¹⁾
32 x 12.5 	0 300 14 0 300 15	0 312 03	0 302 51	0 302 51	0 302 53	0 336 03	0 302 54	0 303 16
32 x 16 	0 308 04 6 489 06	0 312 07	0 333 25	0 333 25	0 333 27	0 336 04	0 333 30	0 303 16
40 x 20 	0 300 27	0 312 11	0 302 81	0 302 81	0 302 83	0 336 06	0 302 08	0 303 16
60 x 20 	0 301 14	0 302 90	0 302 91	0 302 92	0 302 93	0 336 08	0 302 09	0 303 16
75 x 20 	0 300 33	0 303 00	0 303 01	0 303 02	0 303 03	0 336 09	0 302 18	0 303 16

1: Dimensions: 75 x 75 mm



Cable-grip

It makes the installation easier and faster by containing all the wires inside the trunking body before the cover is clipped



Comfortable implementation


■ During installation, the conductors stay in place in the 1 or 2 compartment mini-trunking thanks to cable-grip membranes



Speed of installation

■ Cable holding is integrated with the trunking (no staple to add)
 ■ Easy conductors position
 ■ Quick cover fitting






DLPlus mini-trunking: wiring accessories frames

BODIES	MOSAIC FRAMES											
Size and shape	Installation at the end of the mini-trunking ⁽¹⁾						Installation alongside the mini-trunking ⁽¹⁾					
	2 modules ⁽²⁾ 	3 modules 	4 modules ⁽³⁾ 	6 modules ⁽⁴⁾ 	2 x 4 modules ⁽⁵⁾ 	3 x 4 modules ⁽⁶⁾ 	2 modules ⁽²⁾ 	3 modules ⁽³⁾ 	4 modules ⁽⁴⁾ 	6 modules ⁽⁵⁾ 	2 x 4 modules ⁽⁶⁾ 	3 x 4 modules ⁽⁷⁾ 
	1 frame + 1 adaptor						1 frame + 1 adaptor					
20 x 12.5 	0 316 11 0 316 40	0 316 40	0 316 13 0 316 40	0 316 14 0 316 40	0 316 21 0 316 40	0 316 22 0 316 40	0 316 11 0 317 01	0 317 01	0 316 13 0 317 02	0 316 14 0 317 03	0 316 21 0 317 02	0 316 22 0 317 03
32 x 12.5 	0 316 11 0 316 41	0 316 41	0 316 13 0 316 41	0 316 14 0 316 41	0 316 21 0 316 41	0 316 22 0 316 41	0 316 11 0 317 01	0 317 01	0 316 13 0 317 02	0 316 14 0 317 03	0 316 21 0 317 02	0 316 22 0 317 03
32 x 16 	0 316 11 0 316 41	0 316 41	0 316 13 0 316 41	0 316 14 0 316 41	0 316 21 0 316 41	0 316 22 0 316 41	0 316 11 0 317 04	0 317 04	0 316 13 0 317 05	0 316 14 0 317 06	0 316 21 0 317 05	0 316 22 0 317 06
40 x 20 	0 316 11 0 316 47	0 316 47	0 316 13 0 316 47	0 316 14 0 316 47	0 316 21 0 316 47	0 316 22 0 316 47	0 316 11 0 317 07	0 317 07	0 316 13 0 317 08	0 316 14 0 317 09	0 316 21 0 317 08	0 316 22 0 317 09
60 x 20 	0 316 11 0 316 45	0 316 45	0 316 13 0 316 45	0 316 14 0 316 45	0 316 21 0 316 45	0 316 22 0 316 45	0 316 11 0 317 07	0 317 07	0 316 13 0 317 08	0 316 14 0 317 09	0 316 21 0 317 08	0 316 22 0 317 09
75 x 20 	-	-	0 316 13 0 316 48	0 316 14 0 316 48	0 316 21 0 316 48	0 316 22 0 316 48	0 316 11 0 317 07	0 317 07	0 316 13 0 317 08	0 316 14 0 317 09	0 316 21 0 317 08	0 316 22 0 317 09

1: Use with Mosaic socket outlets
2: Frame dimensions: 127 x 74 x 60 mm
3: Frame dimensions: 149 x 74 x 60 mm


4: Frame dimensions: 172 x 74 x 60 mm
5: Frame dimensions: 217 x 74 x 60 mm

6: Frame dimensions: 162 x 167 x 60 mm
7: Frame dimensions: 228 x 167 x 60 mm

BODIES	Special surface mounting frames for wiring accessories (p. 798-800)		Surface mounting frames for 60 mm fixing centres wiring accessories (p. 801)		
Size and shape	Installation alongside the mini-trunking		Installation alongside the mini-trunking		
	 1 gang for horizontal or vertical	 2 gang for horizontal or vertical	 1 gang for horizontal or vertical	 2 gang for horizontal or vertical	 3 gang for horizontal or vertical
20 x 12.5 	0 314 04	0 314 14	0 316 94	0 316 95	0 316 96
32 x 12.5 	0 314 04	0 314 14	0 316 94	0 316 95	0 316 96
32 x 16 	0 314 56	0 314 66	0 316 94	0 316 95	0 316 96
40 x 20 	0 314 08	0 314 18	0 316 94	0 316 95	0 316 96
60 x 20 	0 314 08	0 314 18	0 316 94	0 316 95	0 316 96
75 x 20 	0 314 08	0 314 18	0 316 94	0 316 95	0 316 96

DLPlus mini-trunking 20 x 12.5 and 32 x 12.5

profiles and finishing accessories

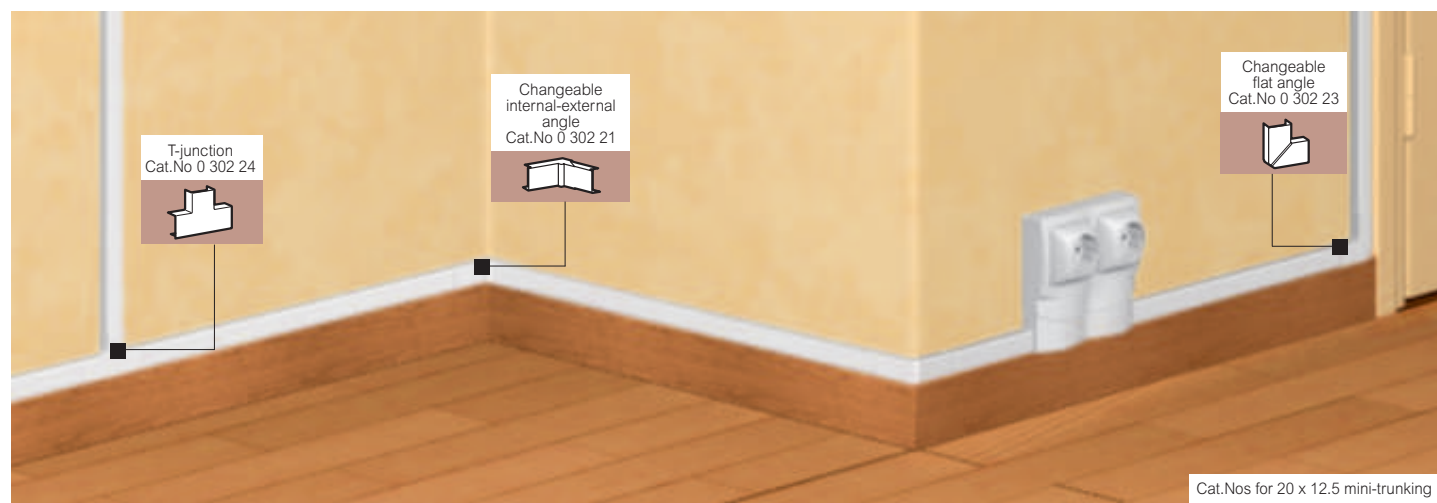

Selection chart **p. 796-797**
Wiring capacity chart **see e-catalogue**

Pack	Cat.Nos		Mini-trunking	
			EN 50085-2-1 approved	
			Without central partition	
			Mini-trunking with cable grip	
			Equipped with an integrated device	
			for holding cables in place	
			Length 2.10 m	
120' 80'	20 x 12.5	32 x 12.5	Without adhesive	
120' 80'	0 300 08	0 300 15	With adhesive	
			6 489 05	
			With central partition	
			Length 2.10 m	
120' 80'	0 300 07	0 300 14		
Pack	Cat.Nos		Special frames	
			Supplied with end cap and divider	
			for separation of currents	
			Installation alongside the mini-trunking	
			For vertical or horizontal mounting of surface	
			mounting wiring accessories (p. 804)	
10	0 314 04		1 gang	
5	0 314 14		2 gang	
Pack	Cat.Nos		Adaptors	
			Adaptor for mounting Mosaic frames at end of the mini-trunking	
			For 20 x 12.5 mini-trunking	
10	0 316 40			
			For 32 x 12.5 mini-trunking	
10	0 316 41			
			Adaptor for mounting Mosaic frames alongside the mini-trunking	
			For Mosaic frames Cat.No 0 316 11 (p. 801)	
10	0 317 01			
			For Mosaic frames Cat.Nos 0 316 13	
10	0 317 02			
			and 0 316 21 (p. 801)	
			For Mosaic frames Cat.Nos 0 316 14	
5	0 317 03			
			and 0 316 22 (p. 801)	

Finishing accessories

20	20 x 12.5	32 x 12.5	End cap
	0 312 02	0 312 03	
10	0 302 21	0 302 51	Changeable internal-external angle
10	0 302 23	0 302 53	Changeable flat angle
20	0 336 02	0 336 03	Cover joint
10	0 302 24	0 302 54	Flat T-junction

1: Number of metres in pack


Connection of luminaires **p. 801**

Other frames for wiring accessories **p. 801**

Surface-mounting wiring accessories **p. 804**


DLPlus mini-trunking 32 x 16 and 40 x 20

profiles and finishing accessories

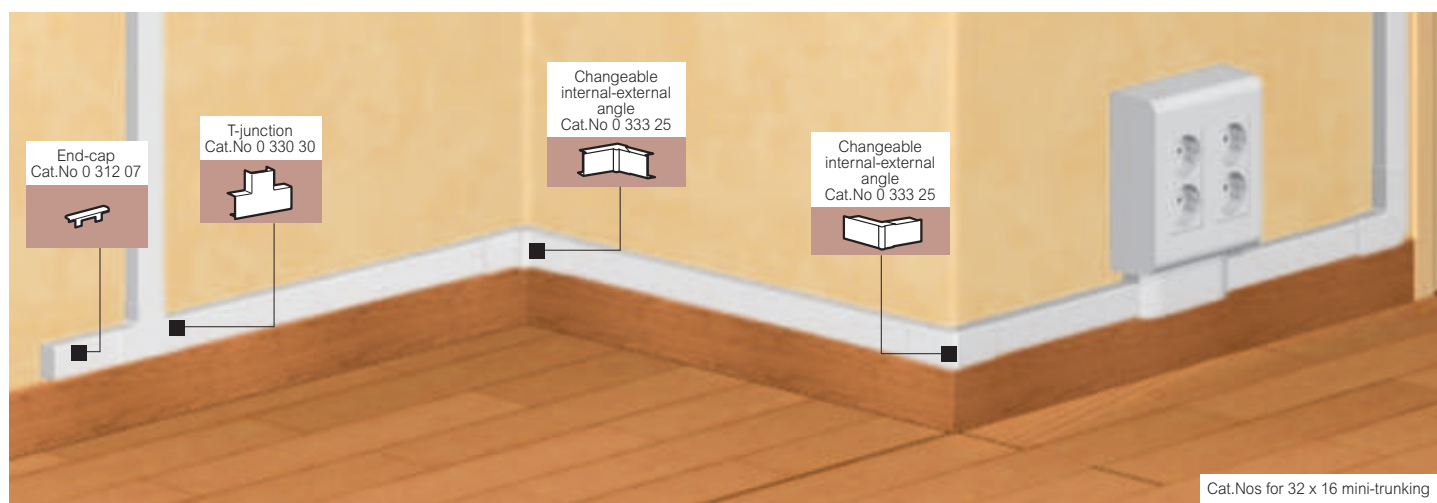

Selection chart **p. 796-797**
Wiring capacity chart **see e-catalogue**

Pack	Cat.Nos		Mini-trunking with cable grip
	32 x 16	40 x 20	EN 50085-2-1 approved Equipped with an integrated device for holding cables in place
60' 48' 60'	0 308 04 6 489 06	0 300 27	Without central partition Length 2.10 m Without adhesive With adhesive



Pack	Cat.Nos		Finishing accessories
10	0 312 07	0 312 11	End cap
10	0 333 25	0 302 81	Changeable internal-external angle
10	0 333 27	0 302 83	Changeable flat angle
20	0 336 04	0 336 06	Cover joint
10	0 333 30	0 302 08	Flat T-junction

Pack	Cat.Nos		Special frames
	32 x 16	40 x 20	Supplied with end cap and divider for separation of currents
10	0 314 56	0 314 08	Installation alongside the mini-trunking For vertical or horizontal mounting of surface mounting wiring accessories (p. 804)
5	0 314 66	0 314 18	1 gang 2 gang

1: Number of metres in pack

Pack	Cat.Nos		Adaptors
10	32 x 16 0 316 41	40 x 20 0 316 47	Adaptors for mounting Mosaic frames at end of the mini-trunking For 32 x 16 and 40 x 20 mini-trunking
10	32 x 16 0 317 04	40 x 20 0 317 07	Adaptors for mounting Mosaic frames alongside the mini-trunking For Mosaic frames Cat.No 0 316 11 (p. 801)
5	0 317 05	0 317 08	For Mosaic frames Cat.Nos 0 316 13 and 0 316 21 (p. 801)
5	0 317 06	0 317 09	For Mosaic frames Cat.Nos 0 316 14 and 0 316 22 (p. 801)

Connection of luminaires **p. 801**


Junction boxes **p. 801**

Other frames for wiring accessories **p. 801**

Surface-mounting wiring accessories **p. 804**


DLPlus mini-trunking 60 x 20 and 75 x 20

profiles and finishing accessories

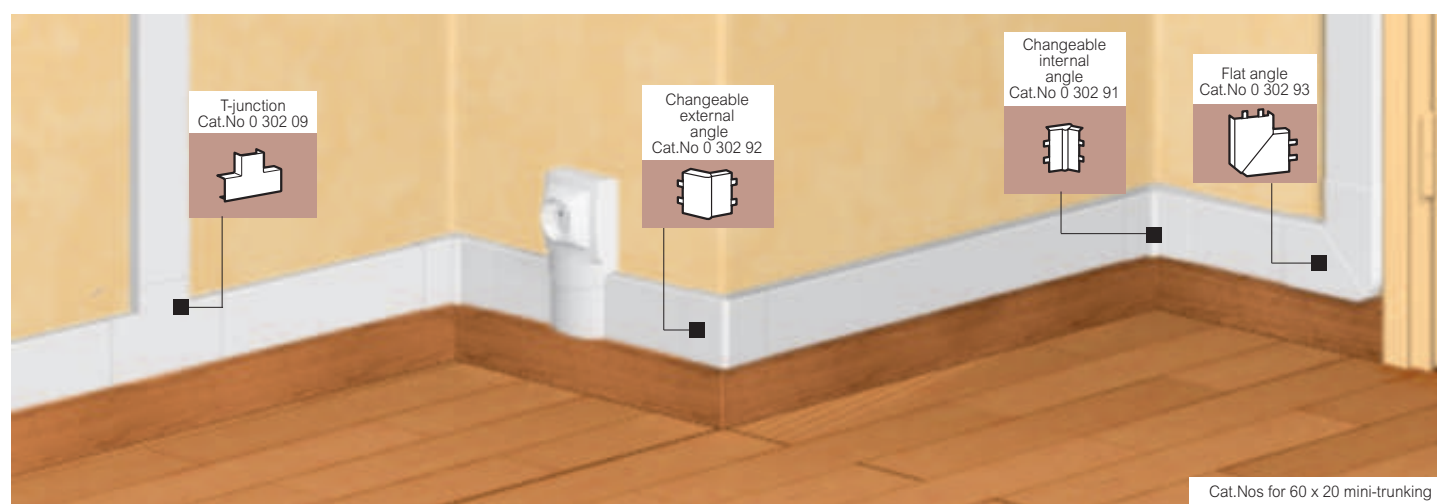

Selection chart **p. 796-797**
Wiring capacity chart **see e-catalogue**

Pack	Cat.Nos	3-compartment mini-trunking
32' 20'	60 x 20 0 301 14	3 compartments for distribution of high and low currents Length 2.10 m White



Pack	Cat.Nos	Finishing accessories
10	60 x 20 0 302 90	End cap
10	0 302 91	Changeable internal angle
10	0 302 92	Changeable external angle
10	0 302 93	Flat angle
20	0 336 08	Cover joint
10	0 302 09	Flat T-junction
1	0 328 05	Junction to floor duct

Pack	Cat.Nos	Special frames
10	0 314 08	Supplied with end cap and divider for separation of currents Installation alongside the mini-trunking For vertical or horizontal mounting of surface mounting wiring accessories (p. 804) 1 gang
5	0 314 18	2 gang

1: Number of metres in pack


Pack	Cat.Nos	Adaptors
10	0 316 45	Adaptors for mounting Mosaic frames at the end of the mini-trunking For 60 x 20 mini-trunking
10	0 316 48	For 75 x 20 mini-trunking (for 4 and 6 modules only)
10	0 317 07	Adaptors for mounting Mosaic frames alongside the mini-trunking For Mosaic frames Cat.No 0 316 11 (p. 801)
5	0 317 08	For Mosaic frames Cat.Nos 0 316 13 and 0 316 21 (p. 801)
5	0 317 09	For Mosaic frames Cat.Nos 0 316 14 and 0 316 22 (p. 801)

Other frames for wiring accessories
(see opposite)

Surface-mounting wiring accessories **p. 804**

DLPlus mini-trunking

frames and installation accessories



Pack	Cat.Nos	Mosaic frames
10	0 316 11	Supplied with support, plate and divider for separation of currents Vertical or horizontal mounting To be used with 2 module Mosaic sockets 2 modules
5	0 316 13	4 modules (for horizontal mounting only)
5	0 316 14	6 modules (for horizontal mounting only)
10	0 316 21	2 x 4 modules
10	0 316 22	3 x 4 modules

Pack	Cat.Nos	Junction boxes
10	0 303 16	White 75 x 75 x 35 mm
10	0 303 26	110 x 110 x 50 mm
10	0 303 36	150 x 150 x 65 mm

Pack	Cat.Nos	60 mm fixing centres wiring accessories frames
5	0 316 94	Installation alongside the mini-trunking Supplied with divider for separation of currents 1 gang, for vertical or horizontal mounting
5	0 316 95	2 gang, for horizontal mounting
5	0 316 96	3 gang, for horizontal mounting

Pack	Cat.Nos	Connection of luminaires
10	0 306 54	Plug-in ceiling rose unit supplied complete with connector hook and locking nut Maximum suspended weight: 25 kg as long as unit is equipped with a suitable fixing device
135	0 306 67	Linking piece between the above unit and the ring trunking Length 3 m
10	0 302 16	Wall and ceiling tap-off for 40 x 20 mini-trunking
10	0 302 26	Wall and ceiling tap-off for 60/75 x 20 mini-trunking
10	0 333 17	Wall and ceiling tap-off for 32 x 12.5 mini-trunking
10	0 333 29	Wall and ceiling tap-off for 32 x 16 mini-trunking

Pack	Cat.Nos	Cutting accessory for trunking
1	0 306 98	DLPlus cutting unit For cutting all plastic trunking Avoids vibration when cutting bases and covers Aluminium Dim.: 225 x 142 x 76 mm

Pack	Cat.Nos	Insulation accessory
10	0 304 18	Base joint Adjustable wall insulation joint, supplied in 5 m lengths Provides continuity between the trunking and the wall, in particular in internal angles


Pack	Cat.Nos	Fixing accessories for trunkings
		For fixing all plastic trunkings
		Wall plugs for immediate fixing No screws or nails required
100	0 308 98	For mini-trunking
100	0 308 99	For mini-trunking, skirting trunking and trunking
		Cartridge of Neoprene Adhesive for glue gun
12	0 309 49	
200	0 308 97	DLP rapid wall plug For 10 mm min. plasterboard walls at least 20 mm away from the concrete surface For fixing DLP plastic trunking in a single operation Used with a special tool for drill (Ø8 mm), supplied in each pack of 200 wall plugs Tensile resistance: 25 kg

Surface-mounting wiring accessories p. 804


Mosaic wiring accessories p. 876

LED system mini-trunking 40 x 12.5

profiles and finishing accessories

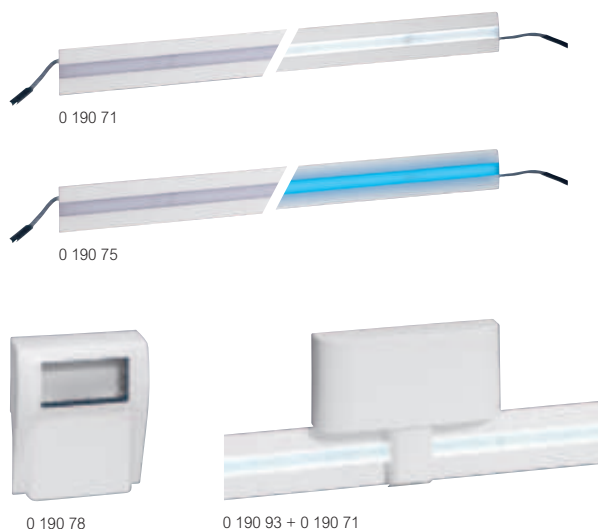

Pack	Cat.Nos	Mini-trunking
		Mini-trunking modules equipped with LED lights covers for contemporary mood lighting To be equipped with drivers Cat.No 0 190 90/91/92 (see opposite) according to required power Can take Mosaic or Arteor wiring accessories via support frame Cat.No 0 190 78
		White colour LED modules
2	0 190 70	Length 0.5 m
2	0 190 71	Length 1 m
2	0 190 72	Length 2 m
1	0 190 73	Door frame kit
		Blue colour LED modules
2	0 190 74	Length 0.5 m
2	0 190 75	Length 1 m
2	0 190 76	Length 2 m
1	0 190 77	Door frame kit
		Mini-trunking without LED
72 ¹	0 190 03	Length 2.1 m Supplied with cover



Pack	Cat.Nos	Finishing accessories
10	0 190 36	End cap
10	0 190 16	Changeable internal angle
10	0 190 12	Changeable external angle
10	0 190 24	Flat angle B
10	0 190 20	Flat angle A
10	0 190 40	Cover joint

Mosaic / Arteor support frame


For LED system mini-trunking and plinth
4 modules (for horizontal mounting only)
To be used with 2-module Mosaic or Arteor sockets

1: Number of meters in pack




LED system plinth 82 x 12.5

profiles and finishing accessories

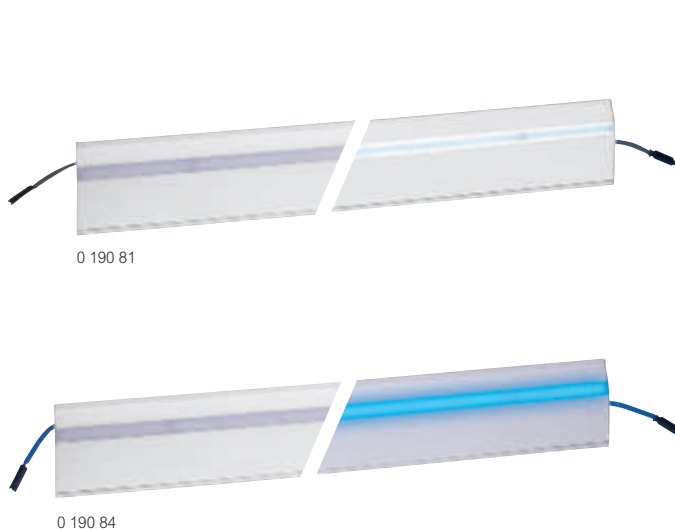

Pack	Cat.Nos	Plinth
		Plinth modules equipped with LED lights covers for contemporary mood lighting To be equipped with drivers Cat.No 0 190 90/91/92 (see opposite) according to required power Can take Mosaic or Arteor wiring accessories via support frame Cat.No 0 190 78
		White colour LED modules
1	0 190 80	Length 0.5 m
1	0 190 81	Length 1 m
1	0 190 82	Length 2 m
		Blue colour LED modules
1	0 190 83	Length 0.5 m
1	0 190 84	Length 1 m
1	0 190 85	Length 2 m
		Plinth without LED
30 ¹	0 190 06	Length 2.1 m Supplied with cover With separation partition



Pack	Cat.Nos	Finishing accessories
10	0 190 49	End cap
5	0 190 45	Changeable internal angle
5	0 190 43	Changeable external angle
10	0 190 53	Right-hand flat junction
10	0 190 54	Left-hand flat junction
10	0 190 51	Cover joint
5	0 190 47	Junction to 30 x 12.5 mm and 40 x 12.5 mm mini-trunking

Fixing accessories for drivers

For fixing drivers alongside LED system mini-trunkings and plinths

Surface mounting


Supplied with two adaptors (for 40 x 12.5 mm respectively 80 x 12.5 mm profiles)
For 10 W driver Cat.No 0 190 90

For 35 and 60 W drivers
Cat.No 0 190 91/92

Flush-mounting

For 35 and 60 W drivers
Cat.No 0 190 91/92

1: Number of meters in pack



LED system covers for snap-on DLP trunking and columns




0 190 90



0 190 99 + 6 530 04 (p. 845)

0 190 87 + 0 756 03 (p. 814)

Pack	Cat.Nos	LED system covers for snap-on DLP trunking and columns
		45 mm width covers with LED lights, to be installed on snap-on DLP trunking (p. 808 to 817) and columns (p. 845) instead of the standard cover supplied with the body To be equipped with drivers Cat.No 0 190 90/91/92 according to required power
		White colour LED modules
1	0 190 86	Length 0.5 m
1	0 190 87	Length 1 m
1	0 190 88	Length 2 m
		Red / green colour LED module
1	0 190 99	Length 0.5 m
		Cover joint
10	6 380 00	Width 45 mm
		Drivers for LED system mini-trunkings, plinths & covers
6	0 190 90	10 W - for a maximum length of 2 m
1	0 190 91	35 W - for a maximum length of 6 m
1	0 190 92	60 W - for a maximum length of 10 m
		Links
10	0 190 97	Length 0.3 m
10	0 190 98	Length 3 m



COLUMNS AND MINI-COLUMNS



Snap-on columns and mini-columns, an **aesthetic** and **multifunctional** range

Modern design and time saving thanks to the snap-on system



- > Columns and mini-columns available in different sizes, from 0.3 m to 3.9 m and from 1 to 4 compartments (p. 845-846)

Columns and mini-columns available in 3 finishes : Aluminium, White and Black.



- > Movable mini-column equipped with table, German standard socket outlets, double USB charging socket, 4-wheel foot and cable (p. 845)

Snap-on DLP trunking **p. 808 to 817**
Snap-on aluminium columns **p. 845**

See the video




Surface-mounting wiring accessories




Pack	Cat.Nos	Switches
10	0 860 01	Two-way switch 10 AX - 250 V~
10	0 860 06	Push-button - NO - 6 A - 250 V~
10	0 860 31	2P+E socket outlet German standard 16 A - 250 V~ shuttered for child safety
10	0 860 29	2P+E socket outlet German standard 16 A - 250 V~
10	0 860 40	TV socket
		TV single socket - 0 - 2400 MHz

Cable guide with adhesive

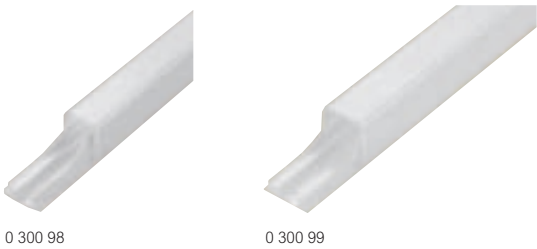

Pack	Cat.Nos	Cable guide with adhesive
------	---------	---------------------------

132 ¹	0 300 98	This cable guide is used to rapidly attach a cable to a wall without damaging It is equipped with a double base insulating the nail or the staple from the cable 2 mounting systems are provided: - nail or staple mounting The base is pre-drilled every 10 cm - adhesive foam mounting: foam base equipped with a self-adhesive film (1 mm thick) Length: 2.10 m Supplied with cover Material: PVC For cable Ø3 to 6 mm
90 ¹	0 300 99	For cable Ø7 and 9 mm
120 ¹	6 489 04	16 x 16 mm






1: Number of metres in pack

When removing the frame, can be installed in DLPlus mini-trunking systems **p. 796 to 801**

DLP-S distribution mini-trunking with adhesive **p. 805 to 807**

20 x 12.5 mm and 32 x 16 mm cable guides with adhesive **p. 798 and 799**

DLP-S distribution mini-trunking: profiles and accessories

BODIES	SECTION		FINISHING ACCESSORIES						ADAPTORS
Size and shape	Length 2 m		End cap	Internal angle	External angle	Flat angle	Cover joint	Flat T-junction	For Forix wiring devices
	Wall plugs	With adhesive							
15 x 10 	6 381 00	6 381 09	6 381 05	6 381 01	6 381 02	6 381 03	6 381 06	6 381 04	6 381 07
20 x 12 	6 381 20	6 381 29	6 381 25	6 381 21	6 381 22	6 381 23	6 381 26	6 381 24	6 381 17
24 x 14 	6 381 30	6 381 39	6 381 35	6 381 31	6 381 32	6 381 33	6 381 36	6 381 34	6 381 27
16 x 16 	6 381 10	6 381 19	6 381 15	6 381 11	6 381 12	6 381 13	6 381 16	6 381 14	6 381 37
32 x 16 	6 381 40	6 381 49	6 381 45	6 381 41	6 381 42	6 381 43	6 381 46	6 381 44	6 381 47
40 x 16 	6 381 50	6 381 59	6 381 55	6 381 51	6 381 52	6 381 53	6 381 56	6 381 54	6 381 57
50 x 20  	6 381 60	-	6 381 65	6 381 61	6 381 62	6 381 63	6 381 66	6 381 64	-
	6 381 68	-							
60 x 20 	6 381 70	-	6 381 75	6 381 71	6 381 72	6 381 73	6 381 76	6 381 74	-
40 x 40 	6 381 80	-	6 381 85	6 381 81	6 381 82	6 381 83	6 381 86	6 381 84	-

DLP-S DISTRIBUTION MINI-TRUNKING AND FORIX WIRING ACCESSORIES: A HIGH QUALITY FINISH


	1 	2 
Used vertically or horizontally, the special adaptor hides any cutting flaws on the mini-trunking	When Forix is installed alongside the mini-trunking, the special adaptor needs to be cut	Once the special adaptor is fitted, it will hide the cut on the mini-trunking

TIME-SAVING AND OPTIMISED INSTALLATION

1 	2 	3 
Remove the protective strip from the adhesive foam on the back of the mini-trunking	Place the mini-trunking in the required position and press it firmly against the wall	The cover fits onto the profile very easily, with a single click

DLP-S distribution mini-trunking 15 x 10 / 20 x 12 / 24 x 14 and 16 x 16

Distribution 15 x 10 mm

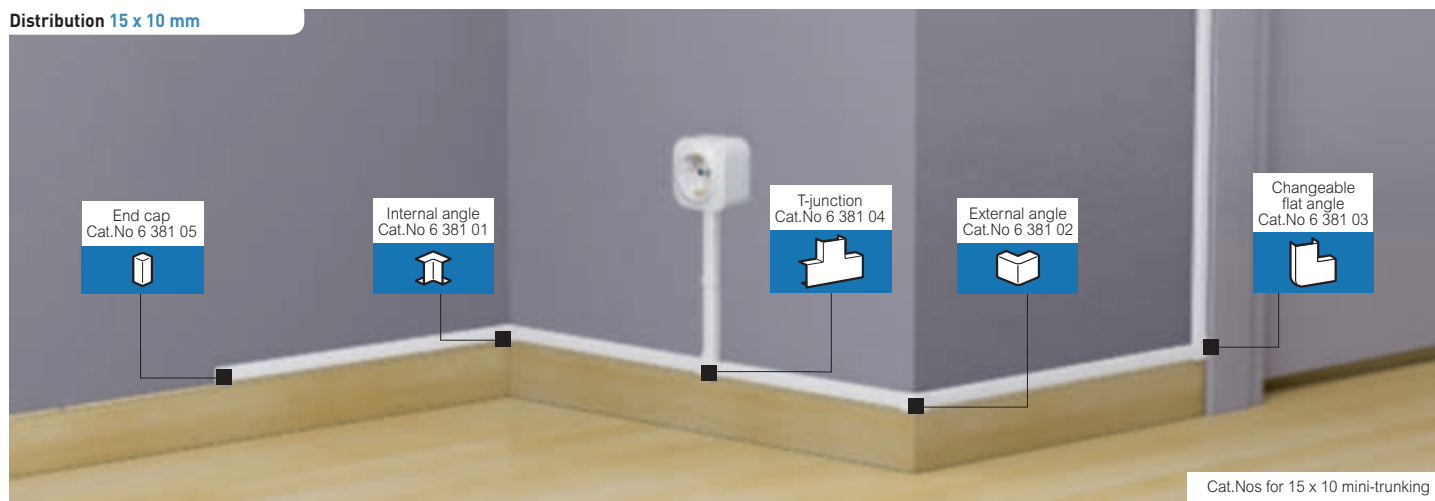

Selection chart **p. 805**
Technical characteristics **see e-catalogue**

Pack Cat.Nos 15 x 10 mm mini-trunking

154 ¹	6 381 00	Without central partition Conform to EN 50085-2-1 To be fixed with wall plugs Supplied in 77 lengths of 2 metres
80 ¹	6 381 09	With adhesive Supplied in 40 lengths of 2 metres




Finishing accessories for 15 x 10 mm mini-trunking

10	6 381 05	End cap
10	6 381 01	Internal angle
10	6 381 02	External angle
10	6 381 03	Flat angle
10	6 381 06	Cover joint
10	6 381 04	Flat T-junction

20 x 12 mm mini-trunking

96 ¹	6 381 20	Without central partition Conform to EN 50085-2-1 To be fixed with wall plugs Supplied in 48 lengths of 2 metres
42 ¹	6 381 29	With adhesive Supplied in 21 lengths of 2 metres




Finishing accessories for 20 x 12 mm mini-trunking

10	6 381 25	End cap
10	6 381 21	Internal angle
10	6 381 22	External angle
10	6 381 23	Flat angle
10	6 381 26	Cover joint
10	6 381 24	Flat T-junction

Pack Cat.Nos 24 x 14 mm mini-trunking

70 ¹	6 381 30	Without central partition Conform to EN 50085-2-1 To be fixed with wall plugs Supplied in 35 lengths of 2 metres
66 ¹	6 381 39	With adhesive Supplied in 33 lengths of 2 metres




Finishing accessories for 24 x 14 mm mini-trunking

10	6 381 35	End cap
10	6 381 31	Internal angle
10	6 381 32	External angle
5	6 381 33	Flat angle
10	6 381 36	Cover joint
5	6 381 34	Flat T-junction

16 x 16 mm mini-trunking

150 ¹	6 381 10	Without central partition Conform to EN 50085-2-1 To be fixed with wall plugs Supplied in 75 lengths of 2 metres
50 ¹	6 381 19	With adhesive Supplied in 23 lengths of 2 metres



Finishing accessories for 16 x 16 mm mini-trunking

10	6 381 15	End cap
10	6 381 11	Internal angle
10	6 381 12	External angle
10	6 381 13	Flat angle
10	6 381 16	Cover joint
10	6 381 14	Flat T-junction


1: Number of meters in pack






Adaptors for mounting Forix wiring devices **p. 807**

DLP-S distribution mini-trunking 32 x 16 / 40 x 16 / 50 x 20 / 60 x 20 and 40 x 40

Distribution 40 x 16 mm

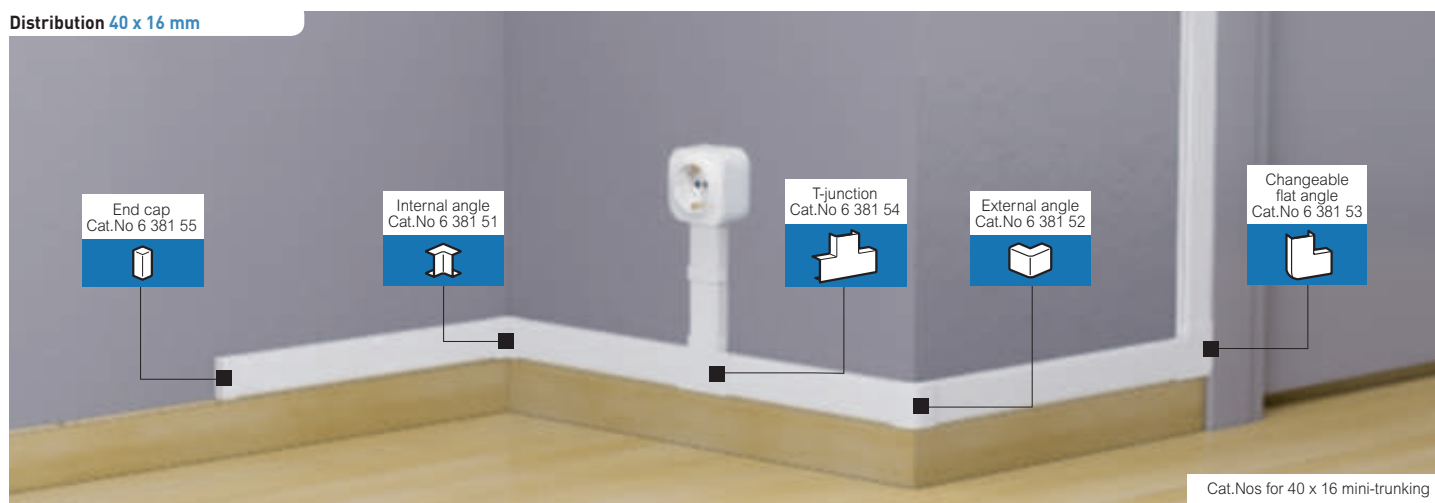

Selection chart **p. 805**
Technical characteristics **see e-catalogue**

Pack	Cat.Nos		32 x 16 and 40 x 16 mm mini-trunking		Pack	Cat.Nos		Finishing accessories for 50 x 20 and 60 x 20 mm mini-trunking		
80'	32 x 16 6 381 40		Without central partition Conform to EN 50085-2-1 To be fixed with wall plugs Supplied in 40 lengths of 2 metres With adhesive Supplied in 18 lengths of 2 metres		5 5	50 x 20 6 381 65	60 x 20 6 381 75	 End cap		
36'	6 381 49				10	6 381 61	6 381 71	 Internal angle		
60'		40 x 16 6 381 50			10 5	6 381 62	6 381 72	 External angle		
60'	6 381 59				10 5	6 381 63	6 381 73	 Flat angle		
			To be fixed with wall plugs Supplied in 30 lengths of 2 metres With adhesive Supplied in 30 lengths of 2 metres		10 5	6 381 66	6 381 76	 Cover joint		
					5 5	6 381 64	6 381 74	 Flat T-junction		
10	32 x 16 6 381 45	40 x 16 6 381 55			Finishing accessories for 32 x 16 and 40 x 16 mm mini-trunking		24'	6 381 80		40 x 40 mm mini-trunking Length 2 m Supplied in 12 lengths of 2 metres Conform to EN 50085-2-1 Without central partition 
10	6 381 41	6 381 51			 End cap					
5 10	6 381 42	6 381 52	 Internal angle							
10	6 381 43	6 381 53	 External angle							
10	6 381 46	6 381 56	 Flat angle							
10	6 381 44	6 381 54	 Cover joint							
10			 Flat T-junction							
			50 x 20 and 60 x 20 mm mini-trunking					Finishing accessories for 40 x 40 mm mini-trunking		
40' 32'	50 x 20 6 381 60	60 x 20 6 381 70	Conform to EN 50085-2-1		10	6 381 85			 End cap	
			Without central partition		5	6 381 81			 Internal angle	
			Length 2 m Supplied in 20 or 16 length of 2 metres		5	6 381 82			 External angle	
					5	6 381 83			 Flat angle	
40'	6 381 68		With central partition		10	6 381 86		 Cover joint		
			Length 2 m Supplied in 20 lengths of 2 metres		5	6 381 84		 Flat T-junction		
								Adaptors for mounting Forix wiring devices on the mini-trunking 		
					10	6 381 07			For 15 x 10 mm mini-trunking	
					10	6 381 17			For 20 x 12 mm mini-trunking	
					10	6 381 27			For 24 x 14 mm mini-trunking	
					10	6 381 37			For 16 x 16 mm mini-trunking	
					10	6 381 47			For 32 x 16 mm mini-trunking	
					10	6 381 57			For 40 x 16 mm mini-trunking	

1: Number of meters in pack

Forix surface mounting wiring devices **p. 542**